

Add: Jinfeng Industry Zone, Xiangcheng District, Zhangzhou, Fujian, China

Post Code: 363000

Tel: +86-596-2593298

Fax: +86-596-2593597


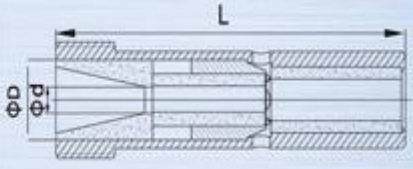
E-mail: sales@lidun-tech.com


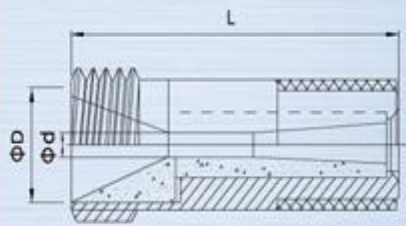
http://www.lidun-tech.com

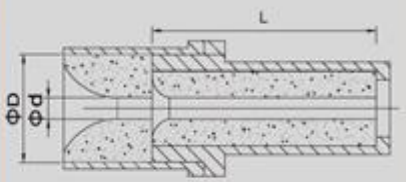
Boron Carbide Nozzle Catalogue

Boron carbide is the third hard material after diamond and cubic boron nitride. Its theoretical density is 2.52g/cm³, melting point is 2450°C, microhardness is 4950kgf/mm². Features high hardness, light weight, excellent wear resistance and acid-base resistance.



	产品规格(毫米) / Specifications(mm)			
LD-1001	$\phi 2-\phi 14$	$\phi 16-\phi 37$	10-110	
	产品规格(毫米) / Specifications(mm)			
LD-1002	$\phi 3-\phi 14$	$\phi 16-\phi 30$	50-110	
	产品规格(毫米) / Specifications(mm)			
LD-1003	$\phi 6.4-\phi 11$	$\phi 30$		
	产品规格(毫米) / Specifications(mm)			
LD-1004	$\phi 0.8-\phi 2$	$\phi 6-\phi 10$	10-80	






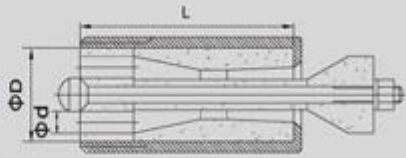


	产品规格(毫米) / Specifications(mm)			
	内径 ϕd I.D	外径 ϕD O.D	长度 L Length	
LD-1005	$\phi 6.4-\phi 11$	$\phi 19-\phi 30$	145-210	

	产品规格(毫米) / Specifications(mm)			
	内径 ϕd I.D	外径 ϕD O.D	长度 L Length	
LD-1006	$\phi 6.4-\phi 12.5$	$\phi 37$	145-225	

	产品规格(毫米) / Specifications(mm)			
	内径 ϕd I.D	外径 ϕD O.D	长度 L Length	
LD-1007	$\phi 6-\phi 12$	$\phi 21-\phi 30$	25-107	

	产品规格(毫米) / Specifications(mm)			
	内径 ϕd I.D	外径 ϕD O.D	长度 L Length	
LD-1008	$\phi 6-\phi 12$	$\phi 21-\phi 24$	50-60	

	产品规格(毫米) / Specifications(mm)			
	内径 ϕd I.D	外径 ϕD O.D	长度 L Length	
LD-1009	$\phi 6-\phi 12$	$\phi 21-\phi 24$	80-120	

	产品规格(毫米) / Specifications(mm)			
	内径 Φd I.D	外径 ΦD O.D	长度 L Length	
LD -1010	Φ80-Φ130	Φ37-Φ145	50-110	
	产品规格(毫米) / Specifications(mm)			
	内径 Φd I.D	外径 ΦD O.D	长度 L Length	
LD -1011	Φ6.4-Φ12.5	Φ18-Φ37	35-80	
	产品规格(毫米) / Specifications(mm)			
	内径 Φd I.D	外径 ΦD O.D	长度 L Length	
LD -1012	Φ6-Φ12	Φ50	50-60	
	产品规格(毫米) / Specifications(mm)			
	内径 Φd I.D	外径 ΦD O.D	长度 L Length	
LD -1013	Φ50-Φ80	Φ95-Φ97	80-110	